


2X M3 PIN SLOT
FOR MOUNTING

2X M3 TAP
FOR MOUNTING


Ø 2.25in
[57.2mm]

2 5/8" - 32
THREAD FOR MOUNT

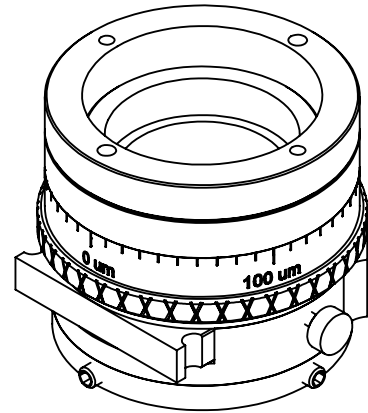


2X COVER GLASS
CARTRIDGE
LOCK THUMB SCREWS

FOCAL LENGTH
ADJUST
± 4mm

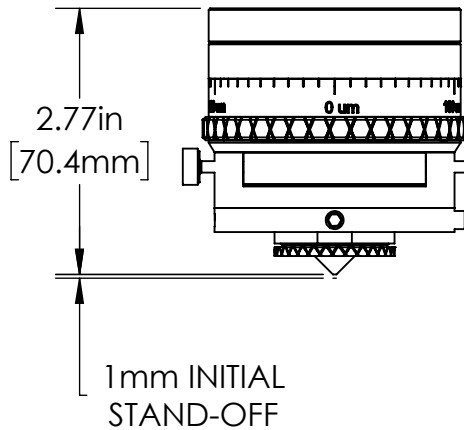

COVER GLASS
CARTRIDGE
1"x1/8" 200 PSI MAX

2X X-Y ULTRA
PRECISION
ADJUST

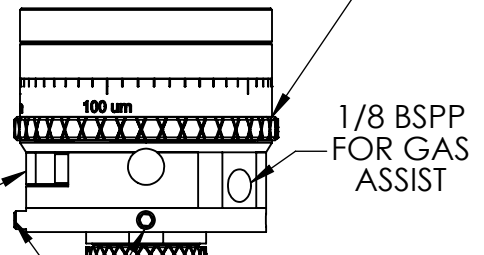

FOR INFORMATION ONLY
NOT FOR MANUFACTURING

DATE:
7/27/2017

DRAWN BY:
MPM

CHK'D BY:
RS

TOLERANCES:
(EXCEPT AS NOTED)
X.XXX = ± 0.005

X.XX = ± 0.01

X X/X = ± 1/64

ANGULAR: ± 0.5°



37 IRONIA ROAD
FLANDERS NJ 07836
(973) 598-1150
Fax: 598-1151

HAAS DOCUMENT# MMH-25-34-50-SALES

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE.
CONTACT HAAS LTI FOR MORE INFORMATION.

MMH-25-34-50
CUSTOMER DIMENSION DWG

BOM#
NA

SCALE: 1:1/A